



The industry's easiest installation.

INSTALLING

With acoustic panels from I-Wood Denmark®, you get the industry's easiest installation. All panels are created with the focus on ensuring simple installation for both DIYers and professionals. Perfect joints, a perfect finish and the perfect way to invite Nordic nature into your home.

VIDEO

Scan the QR codes:



INSTALLING A CEILING (video)
www.i-wooddenmark.com/installing-a-ceiling



INSTALLING A WALL (video)
www.i-wooddenmark.com/installing-a-wall



INSTALLING WALLS INCL. BATTEN BOARD/INSULATION (video)
www.i-wooddenmark.com/installing-walls-incl-batten-board-insulation

NATURAL MATERIALS

An I-Wood Denmark® panel is a natural product in the world's best and most classic sense. Sorting will therefore always be reflected in the natural character of the wood. Each piece of wood has its own expression and unique grain. You can therefore expect variation in the colour and expression of the wood. Our pictures are indicative.

MAINTENANCE


I-Wood Denmark® products basically require minimal maintenance, as they are natural products. We therefore recommend simply dusting the products as needed. Natural products can over time vary in expression and colour depending on the individual product and environment.

TEMPERATURE

I-Wood Denmark® ceiling and wall panels must be stored in a dry and warm place. This will ensure a safe, consistent humidity level of approx. 4-10%. The room where your new wood panels are to be installed must therefore also be dry and warm – and heated to approx. 17-21 degrees. We recommend a humidity level of about 30-60%.




INSTALLING - FASTENING WITH ROUND NAILS

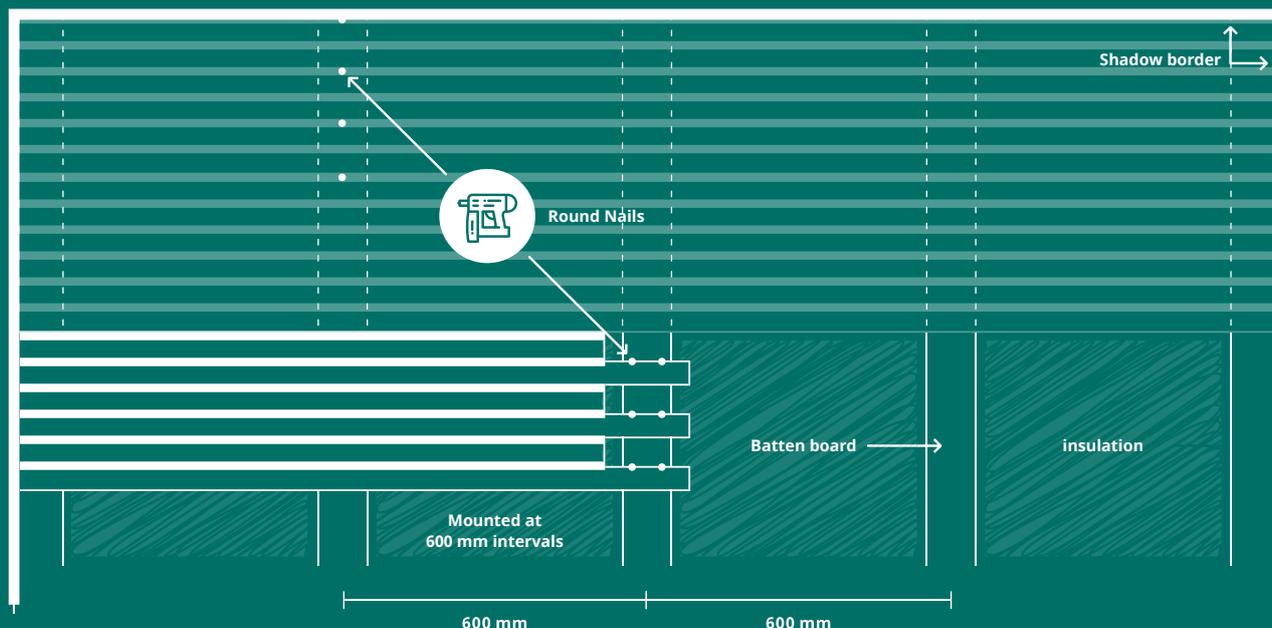

IMPORTANT

We recommend gluing the fingerjoints between to panels (6 dots)

INSTALLING - FASTENING WITH ADHESIVE

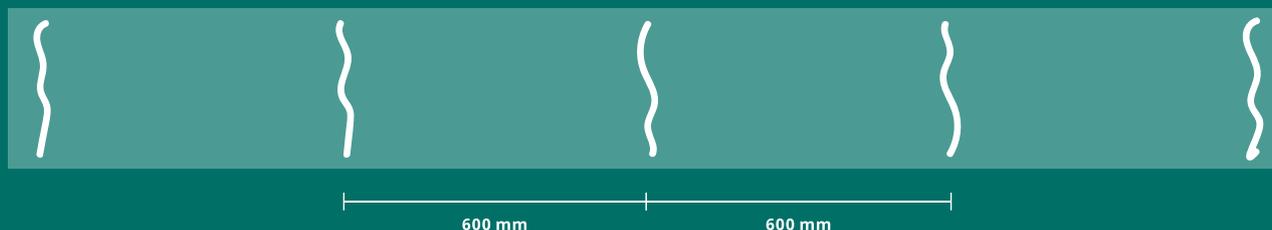

SHADOW EDGE

Create a shadow edge from our filter rolls (1.5 x 100 mm) and attach it to the batten board before installing. We always recommend using batten board around all the walls of the room by omitting the outer batten board sideways and making room for batten board at the end of the room (min. 22 x 45 mm). Mount the batten board with felt together with the ceiling panels, so that all wall surfaces can be covered in one process.

You can also make shadow edges from a solid felt strip of 3 x 31 mm. These can be installed after the batten board has been installed in connection with ceiling installation. Please be aware that a shadow edge only covers 3 mm down the wall.

REPAIR OIL

With I-Wood Denmark® repair oil, you can treat minor damage to the surface, such as superficial scratches or discolouration. The oil is an optional extra, and is a small portion of the original oil your wood panels are treated with.